

# WVI20187-PIRH

## 2MP PIR Siren Full Time Color Bullet Camera



- 2 MP, 1920 × 1080 resolution
- 24-hour color image
- 130 dB true WDR, 3D DNR
- 3.6 mm fixed lens
- Smart Light, up to 40 m white light distance
- PIR detection, strobe light alarm, alarm out/audible alarm
- Built-in siren
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67



\*ฟังก์ชัน PIR แนะนำใช้กับเครื่องรุ่น WVR068H, WVR069H, WVR070H


Menu

### Technical Specification

#### Camera

Sensor	2 MP CMOS
Signal System	PAL/NTSC
Resolution	1920 (H) × 1080 (V)
Frame Rate	TVI: 1080p@30fps, 1080p@25fps AHD: 1080p@30fps, 1080p@25fps CVI: 1080p@30fps, 1080p@25fps CVBS: PAL/NTSC
Min. illumination	Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with White Light
Shutter Time	PAL: 1/25 s to 1/50, 000 s NTSC: 1/30 s to 1/50, 000 s
Slow Shutter	Max. 16 times
Lens	3.6 mm fixed lens
Horizontal Field of View	3.6 mm, horizontal FOV: 83.0°, vertical FOV: 44.4°, diagonal FOV: 98.0°
Lens Mount	M16
Day & Night	Color
WDR (Wide Dynamic Range)	≥130 dB
Flashing Light Alarm (Red & Blue)	Yes
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Audible Alarm	Yes

### Dimensions

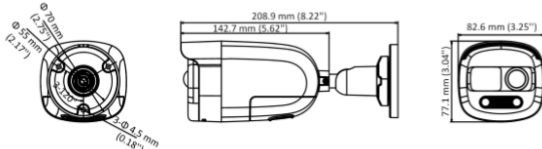

White Balance	Auto/Off
AGC	Yes
Image Mode	STD/HIGH-SAT
White Balance	Auto/Manual
AE (Auto Exposure) Mode	WDR/BLC/HLC/Global/HLS
Anti-Banding	Yes
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable areas
Noise Reduction	3D DNR/ 2D DNR
Language	English
Functions	Brightness, Sharpness, Mirror, Smart Light, Defective Pixel Correction
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
Alarm	1 alarm out
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ± 25%
Power Consumption	Max. 8.5 W
Protection Level	IP67
Material	Front Cover: Metal Main Body: Plastic
White Light	Up to 40 m
PIR Range	Angle: 110°, Range: 11 m
Dimensions	77.1 mm × 82.6 mm × 208.9 mm (3.04" × 3.25" × 8.22")
Weight	Approx. 441 g ( 0.97 lb.)

