


## 8 Port AI PoE Switch with 2GE Uplink

MODEL : WSC092

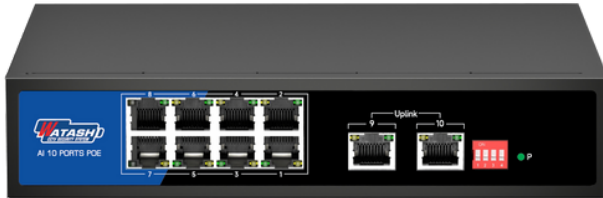

- AI PoE WatchDog : Automatic detection power of port, power off and restart the device if find dead machine
- 250 m long distance power supply (should be use cat5e or cat6 cable)
- AI QoS: Network storm control : Able to limited the network strom within 3%
- AI VLAN: Isolating ports 1-8 to each other can effectively suppress network storms and improve network performance

Specification	
Manage	None Managed
PoE	Support PoE
Housing	Metal
Ports	8X10/100Mbps RJ45
	2X10/100/1000Mbps RJ45
Switch Chipset	Realtek
PoE Standard	IEEE802.3af/at
PoE Chipset	Realtek, Support PoE negotiate power supply
PoE Pin	1,2 + / 3,4-
Single Port Max Power	30W
AI DIP Switch	PoE Watchdog: Auto reboot the unresponsive PoE devices for recovery
	250M: 1-8 ports support 250m power and data transmission
	Port Isolation: All LAN ports are isolated from each other to avoid interference
	Network storm control: Able to limited the network storm within 3%



## 8 Port AI PoE Switch with 2GE Uplink

MODEL : WSC092

Specification	
Total PoE Power	120W
Switch Capacity	5.6G
Forwarding Rate	4.166Mpps
Mac Table	2K
Buffer	2K
Forwarding Delay	<5us
MDX/MIDX	Support
Working Temperature	(-10°C~+50°C)
Storage temperature	(-40°C~+70°C)
Relative humidity	5%~95% non-condensing
MTBF	100000 Hours
ESD	8KV~ 15KV
Surge Proof	General 6000V Difference: 2000V
Free Fall	0.5m
Product Size	220*162*37mmLxWxH
Weight	0.82Kgs
Power In	AC 110-240V 50/60Hz

