


8 Port AI PoE + 2 Port SFP Manage Switch

MODEL : WSC094



Specification	
Manage	L2 Managed or Light L3
PoE	Support PoE
Housing	Metal
Ports	8X10/100/1000Mbps RJ45
	2X10/100/1000Mbps SFP
	1 Port ConSole
Switch Chipset	Realtek
PoE Chipset	Realtek, Support PoE negotiate power supply
PoE Standard	IEEE802.3af/at
PoE Pin	1,2 + / 3,4-
Single Port Max Power	30W
AI DIP Switch	No AI Switch Dips , All the Dip switches functions are in software
Total PoE Power	150W - The Power adaptor able to meet CCC, UL standard , but without certificate
Switch Capacity	20G
Forwarding Rate	14.88Mpps
Mac Table	8K
Buffer	4.1M
Forwarding Delay	<8us
MDX/MIDX	Support
Power In	AC 110-240V 50/60Hz

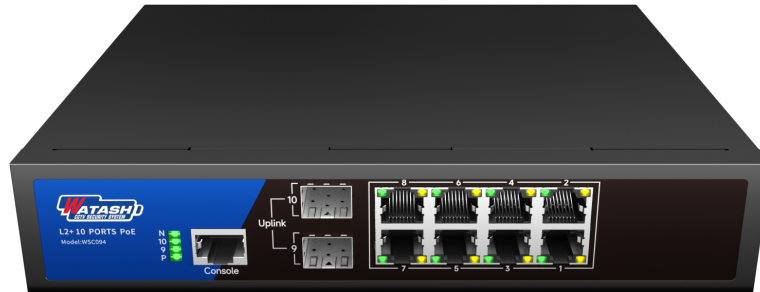

8 Port AI PoE + 2 Port SFP Manage Switch

MODEL : WSC094

Specification	
Network Topology	Support Ring topology
	Support Star topology
	Support Bus topology
	Support Tree Topology
	Support Hybrid topology
VLAN Support	Support 4K Vlan
GARP VLAN	Support
VLAN Protocol VLAN	Support
VLAN Voice VLAN	Support
VLAN Surveillance VLAN	Support
MAC VLAN	Support
Ethernet channel / 802 .3ad	Support
LACP	Support
Interface Speed	Support
Duplex Mode	Support
Flow Control	Support
Jumbo frame	Support
DHCP Server	Support
DHCP Client	Support
DNS Server	Support
DNS Client	Support
SNTP Client	Support
Port Statistics	Support
Protected Ports	Support
High EEE	Support
ERPS Ethernet Ring Protection Switching	Support
LLDP	Support
LLDP 802.1 LLDP 802.1 TLV	Support



8 Port AI PoE + 2 Port SFP Manage Switch

MODEL : WSC094

Specification	
MSTP / RSTP / STP	Support
STP BPDU Filter	Support
STP BPDU guard	Support
STP Port Fast	Support
IGMP Snooping	Support
MLD Snooping	Support
MVR	Support
IPV4 Address management	Support
IPV6 Address management	Support
Static Routes IPv4	Support
Static Routes IPv6	Support
ARP	Support
Loopback Interface	Support
ACL	Support MAC ACL
	Support IPV4 ACL
	Support IPV6 ACL
QoS	Support QOS double remark
	Support port trust
	Support port speed limited
	Support exit port speed limited
	Support SP, WRR
	Support COS forwarding, DSCP Forwarding, IP Priority forwarding
management User Management	Support
System Log	Support
Upgrade Firmware	Support
Configuration File Download/Upload	Support
SNMP	Support
WEB management	Support
CLI	Support



8 Port AI PoE + 2 Port SFP Manage Switch

MODEL : WSC094

Specification	
Telnet/SSH	Support
RMON	Support
Management channel setting	Support
AAA Authentication	Support
802.1X Authentication	Support
MAC-Based Authentication	Support
WEB-Based Authentication	Support
DoS anti-attack	Support
Dynamic ARP checking	Support
DHCP Snooping	Support
IP Source Guard	Support
Port Security	Support
storm control	Support
Console log	Support
RAM log	Support
Flash log	Support
Port Mirror	Support1: 1 or 1: M
Ping	Support
Traceroute	Support
Port testing	Support
SFP info	Support
UDLD	Support
Working Temperature	(-10°C~+50°C)
Storage temperature	(-40°C~+70°C)
Relative humidity	5%~95% non-condensing
MTBF	100000 Hours
ESD	7K~ 15K
Surge Proof	General 6000V , Difference: 2000V
Free Fall	0.5m
Product size / Weight	143X104X46mm / 0.58KG

