



### In the Set consisting of :

- Gateway 1 piece
- Smart Switch Touch 1 piece
- Door Sensor 2 piece
- Smoke Sensor 1 piece
- Siren 1 piece

\*\*\* add device maximum 255 devices



# WIOT5008ZS

## Switch Smart Touch 2 Way




### FEATURES

- 2gate light switch
- Voltage: 100V-240V AC 50-60HZ
- Wireless type: ZigBee
- Control Method: Touch/app/AI
- Function: Remote Control, Timer
- Contact Relay

### SPECIFICATION

|                            |                                |
|----------------------------|--------------------------------|
| Color                      | White                          |
| Voltage                    | 100V-240V AC 50-60HZ           |
| Maximum Output per Channel | 5W-300W                        |
| Wireless type              | Zigbee                         |
| Control Method             | Button Touch/app/Voice Control |
| Function                   | Remote Control, Timer          |
| Housing Material           | PC Frame Retardant Material    |
| Panel Material             | Tempered Glass                 |
| WI-FI consumption          | ≤ 0.3W                         |
| Power Supply               | Single Line (Live Wire)        |
| Support System             | Android/IOS                    |
| Working Humidity           | ≤ 80%                          |
| Operating Temperature      | -40 °C – 85 °C                 |
| Panel Size                 | 86*86*34mm                     |
| Carton Size                | 100*100*40mm                   |

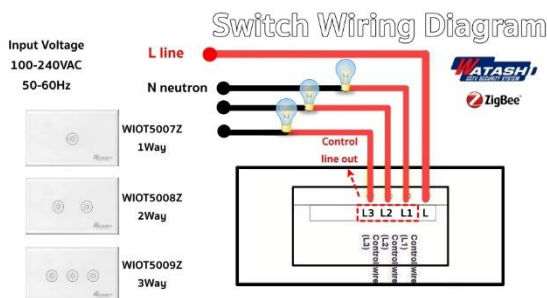

# WIOT5012Z

## Door and Window Magnetic Sensor



### FEATURES

- Door and window switch status monitoring
- Historical status record
- Battery status display
- Low battery reminder
- Intelligent scene linkage
- Supported mobile phone operating systems: Android 4.4+; iOS 8.0+

### SPECIFICATION

|                            |  |
|----------------------------|--|
| Color                      | White  |
| Battery type               | 3V CR2450 Lithium                              |
| Magnet material            | N38  |
| Transport protocol         | Zigbee   |
| Wireless frequency         | 2.4 GHz  |
| Working voltage            | 2.3 V - 3.3 V                                  |
| Working current (reported) | 5 mA on average (Zigbee)                       |
| Standby current            | <3 uA  |
| Working temperature        | -20C to 60C                                    |
| Relative humidity          | 0% to 95% (no condensation)                    |
| Installation               | Choose the closed position of the door/windows |





## FEATURES

1. Zigbee HA1.2 standard protocol, good compatibility;
2. Super-low power consumption ;
3. Remote hush through App;
4. Battery low power report;
5. Battery replaceable;
6. Installation tools free;
7. Mini stylish design with appearance patent;

## SPECIFICATION

|                      |                               |
|----------------------|-------------------------------|
| Color                | White                         |
| Working voltage      | DC3V                          |
| Static current       | ≤10uA                         |
| Alarm current        | ≤60mA                         |
| Networking           | ZigBee/Z-Wave/NB-IOT          |
| Alarm sound output   | 85dB/3m                       |
| Networking range     | ≤50M (In an open environment) |
| Working Environment  | -10℃ ~ +50℃                   |
| Environment humidity | Max 95%RH                     |
| Dimensions           | 54*54*45mm                    |



# WIOT5011Z

## Zigbee Indoor Siren



### FEATURES

- Standards Zigbee HA1.2 protocol, good compatibility;
- Low power consumption design;
- High flexible rotating plug, suitable for different countries;
- Support sound and flash alarm, alarm sound up to 95dB/m;
- Standby battery can last for 6 hours after cutting AC power
- Can be regarded as wireless repeater to extend wireless distance;
- CE, ROHS

### SPECIFICATION

|                       |                                   |
|-----------------------|-----------------------------------|
| Color                 | Red-White                         |
| Transport protocol    | Standards Zigbee HA1.2            |
| Wireless frequency    | 2.4 GHz                           |
| Connect Only          | WIOT5001Z, Gateway Zigbee         |
| Application scope     | Indoor use                        |
| Alarm sound up to     | 95dB/m                            |
| Standby battery (Hr.) | 6 hours                           |
| Power                 | 100-240V                          |
| Standby Battery       | 3.8V/700mA                        |
| Dimension             | Φ80mm*32mm (plug do not included) |

