


10 Port Cloud-Managed *Lite* PoE Switch

MODEL : WSC-PM210E2T

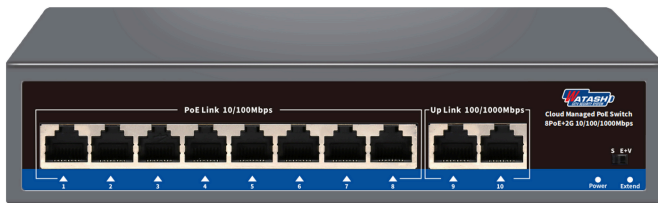

- 8*100Mbps PoE Ports
- 2*1000Mbps Uplink ports
- Support PoE management
- Support WEB
- Port lightning protection 4KV

Specification

Network feature

Network Standard	IEEE802.3、IEEE802.3u、IEEE802.3x、IEEE802.3ab、IEEE802.1Q、IEEE 802.1p
PoE ports	8*100Mbps
Uplink ports	2*1000Mbps
Network Medium	10/100/1000BASE-TX: 5 class and above non shielded twisted pair
Data Distance	≤100M
Switch Capability	7.8Gbps
Forwarding Rate	10BASE-tx: 14880pps/port 100BASE-tx: 148800pps/port 1000BASE-tx: 1488000pps/port
MAC Address	MAC address table 8K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
Forwarding Rate of Packet	4.17Mpps



10 Port Cloud-Managed *Lite* PoE Switch

MODEL : WSC-PM210E2T

Software feature	
Web management	Support Double IP; Default IP: 10.77.88.100 Default management IP: Obtain automatically via DHCP; can also log in the management page to set it as a static IP; User: admin Password: admin
Management IP	Support static IP settings Support DHCP dynamic acquisition
User Setting	Support change user name, change log-in password
Port Management	Support port disabling and enabling; Support MTU setting Support speed, duplex, and flow control settings
Port Isolation	Support Port Isolation
Port speed limit	Support limits the speed of port's in and out
EEE	Support energy-saving Ethernet protocol
PoE	Support PoE configuration
Storm Suppression	Support storm suppression for unknown unicast, multicast, and broadcast packets
Traffic Monitoring	Support monitoring of the number of bytes sent and received, as well as the number of messages sent and received
Cloud-network Link	APP cloud management
System Management	Support system upgrade Support system backup and restore Support reset Support Web restart Support configuration saving; Support switching between Chinese and English Support system name modification



10 Port Cloud-Managed *Lite* PoE Switch

MODEL : WSC-PM210E2T

PoE power supply	
PoE Protocol	IEEE 802.3af/at
Output Power of PoE Port	Single Port≤30W
PoE Output Voltage	DC52V±5%
PoE Power Pin	1/2+、3/6-
PoE Power Distance	≤250m
Network Medium	10/100/1000BASE-TX: 5 class and above non shielded twisted pair
Whole Power	MAX: 120W
Input Voltage	110-220V
Input Frequency	47-63Hz
Input Current	2.5A
Standby Power Consumption	6W
Electric Shock	100A

