

# WIP30268UA-SD

## 3MP Mini Fixed Bullet Network Camera



- Day/night functionality
  - Smart IR, up to 30m (98ft) IR distance
  - 2D/3D DNR (Digital Noise Reduction)
  - Ultra 265, H.265, H.264, MJPEG
  - Built-in Mic
  - Support Micro SD card 128GB
  - ONVIF Conformance
  - Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
  - Support PoE power supply
- IP67  
3-Axis



### Technical Specification

#### Camera

Sensor	1/2.7", 3.0megapixel, progressive scan, CMOS
Lens	2.8mm@F2.0
Angle of view (H, V, O)	112.9°, 59.1°, 121.2°
Adjustment angle	Pan: 0° ~ 360°, Tilt: 0° ~ 90°, Rotate: 0° ~ 360°
Shutter	Auto/Manual, 1 ~ 1/100000s
Minimum Illumination	Color: 0.01Lux (F2.0, AGC ON) 0Lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
Digital noise reduction	2D/3D DNR
S/N	>52dB
IR Range	Up to 30m (98ft) IR range
WDR	DWDR
Defog	Digital Defog
<b>Image</b>	
White Balance	Auto/Outdoor/Fine Tune/Sodium Lamp/Locked/Auto2
HLC	Supported
BLC	Supported
Smart IR	Supported
Flip	Normal/Vertical/Horizontal/180°/90°Clockwise/90°Anti-clockwise


#### Video

Video Compression	Ultra 265, H.265, H.264, MPEG
H.264 code profile	Baseline profile, Main Profile, High Profile
Frame Rate	Main Stream: 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps;
OSD	Up to 4 OSDs
Privacy Mask	Up to 4 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas
<b>Audio</b>	
Audio Compression	G.711
Suppression	Supported
Sampling Rate	8KHZ
<b>Storage</b>	
Edge Storage	Micro SD, up to 128 GB
Network Storage	ANR, NAS(NFS)
<b>Smart Function</b>	
Behavior Detection	Cross line, intrusion (based on human body detection) motion detection, tampering alarm, audio detection
General Function	Watermark, IP address filtering, access policy, ARP protection, RTSP authentication, user authentication, HTTP authentication





### Dimensions

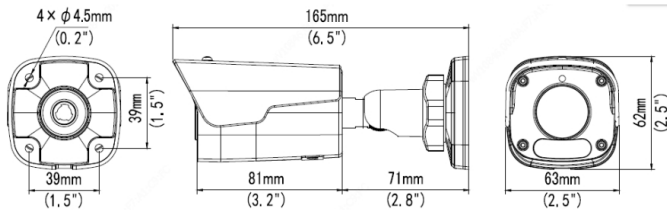

### Technical Specification

Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, RTMP, DNS, DDNS, NTP, UPnP, HTTP, HTTPS, SMTP, QoS, SSL, SNMP
Compatible Integration	ONVIF (Profile S, Profile T, Profile G), API
Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below, Plug-in free live view: Chrome 57.0+, Firefox 58.0+, Edge 16+
Interface	
Network	10/100M Base-TX Ethernet
Built-in Mic	Supported
Certifications	
Certifications	CE: EN 60950-1 UL: UL60950-1 FCC: FCC Part 15
General	
Power	DC 12V±25%, PoE (IEEE 802.3af) Power consumption: Max 7.0W
Dimensions (Ø x H)	165mm x 63mm x 62mm (6.6" x 2.5" x 2.5")
Net Weight	0.39kg (0.86lb)
Material	Metal
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Storage Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Surge Protection	4KV
Ingress Protection	IP67
Reset Button	N/A

